


RAPIDCUT-12

TECHNICAL FEATURES


POWER SUPPLY.....Filtered, lubricated air
 CONSUMPTION.....24 Lt./cut at 7 bar
 MAXIMUM ϕ CUT.....12 ϕ (Steel up to 70 Kg./mm²)
 High tensile wire.....8 ϕ (Steel up to 180 Kg./mm²)
 Prestressing strand max. 12.5 ϕ 1/2" (7x4 ϕ) (max. 180 Kg./mm²)
 SPEED.....20 Cuts/minute
 MAXIMUM PRESSURE.....8.5 bar
 MINIMUM PRESSURE.....6 bar
 WEIGHT.....10 Kg.

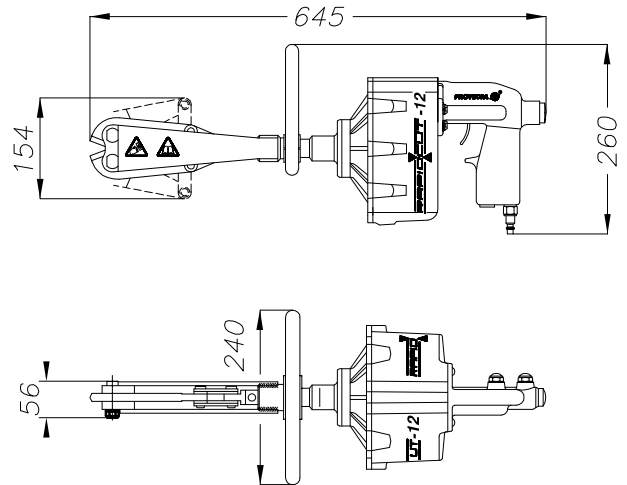


RAPIDCUT-12L

TECHNICAL FEATURES


POWER SUPPLY.....Filtered, lubricated air
 CONSUMPTION.....24 Lt./cut at 7 bar
 MAXIMUM ϕ CUT.....12 ϕ (Steel up to 70 Kg./mm²)
 High tensile wire.....8 ϕ (Steel up to 180 Kg./mm²)
 Prestressing strand max. 12.5 ϕ 1/2" (7x4 ϕ) (max. 180 Kg./mm²)
 SPEED.....20 Cuts/minute
 MAXIMUM PRESSURE.....8.5 bar
 MINIMUM PRESSURE.....6 bar
 WEIGHT.....12 Kg.

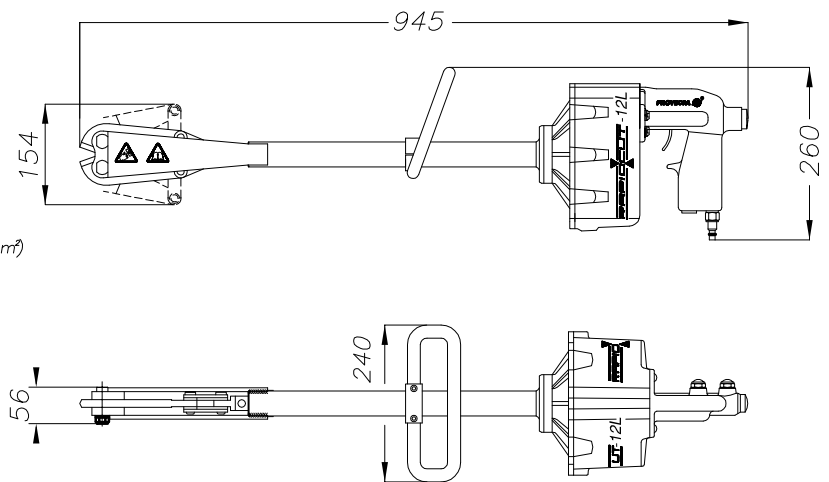


APPROPRIATE BLADE TYPE




MAX. 8 ϕ




REF. 1280TM
 For high tensile wire
 Up to 180 Kg./mm²




MAX. 7x4 ϕ



REF. 1280TS
 For prestressing strand
 Up to 180 Kg./mm²



MAX. 12 ϕ



REF. 1260TM
 For rebar and mesh
 Up to 70 Kg./mm²